

LED DRIVER SPECIFICATIONS

Customer's Part Number:

MOONS' Part Number:

Model:


P/N:

CUSTOMER'S APPROVAL STAMP

--

Please sign back after your approval. The specifications will come into force when we receive purchase order.

DWG	CHK	STANDARD	APPD.

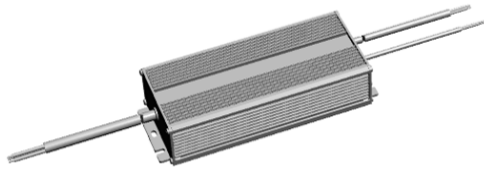

■ **Features**

- Input voltage: 249-528Vac
- Built-in active PFC function: 0.98 Typ.
- High efficiency: 94% Typ.
- Constant current/ 0-10V dimming/ clock dimming(CLK)/ PWM dimming
- Full power at 65%/ 75%Iomax~100%Iomax (constant power)
- IP67 design for indoor or outdoor installations
- High surge immunity
- Compliance to worldwide safety regulations for lighting
- Suitable for dry/damp/wet locations

■ **Specification**



Model (MT240HxxxAQ_CP)		105	150	210	300	420	600	800	1000	1200	
Input	Efficiency (277Vac)(Typ.) _{Note.1}	91.0%	91.0%	90.0%	90.0%	90.0%	90.0%	90.5%	90.5%	90.5%	
	Efficiency (400Vac)(Typ.) _{Note.1}	94.0%	94.0%	93.0%	93.0%	93.0%	93.0%	93.5%	93.5%	93.5%	
	Voltage Range (V) _{Note.2}	249 ~ 528Vac or 352~757Vdc									
	Voltage Rated (V) _{Note.2}	277 ~ 480Vac									
	Frequency Range (Hz)	47~63									
	Power Factor	0.98 (Typ.) at 277Vac, 0.95 (Typ.) at 347Vac, 0.9 (Min.) at 480Vac, with 80%-100% load									
	THD	THD< 20% when output loading ≧ 60% at 277VAC/347VAC input and output loading ≧ 80% at 480VAC input									
	AC Current (Max.)	1.5A at 277Vac input, 1.2A at 347Vac, 1A at 400Vac									
	Inrush Current (Max.)	75A at 480Vac input, 25°C, Cold Start (time wide=500uS, measured at 50% Ipeak,Not applicable for the inrush current to Noise Filter for less than 0.2ms)									
	Leakage Current (Max.)	0.75mA at 480Vac									
Output	Rated Output Voltage (V)	343-228	240-160	171-114	120-80	86-57	60-40	40-30	30-24	24-20	
	Output Voltage Range (V)	343-137	240-96	171-68	120-48	86-34	60-24	40-16	30-12	24-12	
	Rated Current (mA)	700-1050	1000-1500	1400-2100	2000-3000	2800-4200	4000-6000	6000-8000	8000-10000	10000-12000	
	Output Current Range (mA)	70-1050	100-1500	140-2100	200-3000	280-4200	400-6000	600-8000	800-10000	1000-12000	
	Rated Power (W)	240									
	Output Current Setting Range	6.5%-100% of I _{o_max}						8.0%-100% of I _{o_max}			
	Constant Power Setting Range	65%-100% of I _{o_max}						80%-100% of I _{o_max}			
	Ripple Current (Typ.)	10% of I _{o_max} . ((PK-PK) /AV) with LED default mode and full load)									
	Current Tolerance	5%									
	Line Regulation	1%									
	Load Regulation	3%									
	Turn on delay Time	<0.5s, at 230Vac/277Vac/347Vac/400Vac/480Vac									
Dimming Control	12Vdc Output Voltage (Vdc)	10.8Vmin.~12Vtyp.~13.2Vmax.									
	12Vdc Output Current(Vdc)	0mA~20mA max.									
	0~10V/DIM+ Voltage	Absolute maximum voltage -10Vmin~20Vmax									
	0~10V/DIM+ Short Current	280uA~450uA (DIM(+)=0)									
	DIMMING FUNCTION	PWM&1~10V/10%I _o ~100%I _o ref. Dimming module diagram and dimming cruve									
Protection	Over Voltage (V)(Typ.)	>400	>300	>250	>180	>120	>80	>50	>40	>36	
	Short Circuit	Protection type: Hiccup mode. recovers automatically after fault condition is removed.									
	Over temperature	Protection type: Constant Current Limitation. Recovers automatically after fault is removed. Protection type: Decrease output current. When tc reaches 100°C +/-10°C, the output current decrease to approximate 50% of rated value.									
	Operating Temp.	-40~+50°C(Refer to 'Derating Curve')									
Environment	Tc	90°C max									
	Operating Humidity	20~95%RH									
	Storage Temp., Humidity	-40~+85°C , 10-95%RH									
	Temp. Coefficient	0.03%/°C (0~50°C)									
	Vibration	10-500Hz, 5G 12min/cycle, period for 72min each along X、Y、Z axes									
	Safety & EMC	Safety Standard	UL8750, UL1012, CSA C22.2 NO.107.1, EN61347-1, EN61347-2-13								
Withstand Voltage		I/P-O/P:3.75kVac, I/P-FG:1.875kVac, O/P-FG:0.5kVac									
Isolation Resistance		I/P-O/P:100M Ohms (500VDC/25°C/70%RH)									
EMC Emission		FCC Part 15 Class B/ EN55015, EN61000-3-2 Class C, EN61000-3-3									
EMC Immunity		EN61000-4-2,3,4,5,6,8,11, EN61547 (Surge: L-N: ±4kV, L,N-FG: ±6kV)									
Others	MTBF	300,000 Hours, measured at full load, 25°C ambient temperature									
	Lifetime	5yrs(43800hrs) at Tc 80°C(Refer to'Life Time VS. Tcase')									
	Dimension	223 x 90 x 44.5 (mm) (LxWxH)									
	Weight (Typ.)	1.5 kg									

Note.1: Measured at full load and steady-state temperature in 25°C ambient(Efficiency will be about 2% lower if measured immediately after startup); Note. 2: Derating may be needed under low input voltage, Please Refer to 'Derating Curve' ; Note. 3: All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C ambient temperature;


subject to change without notice

Page 1 of 6


Derating Curve

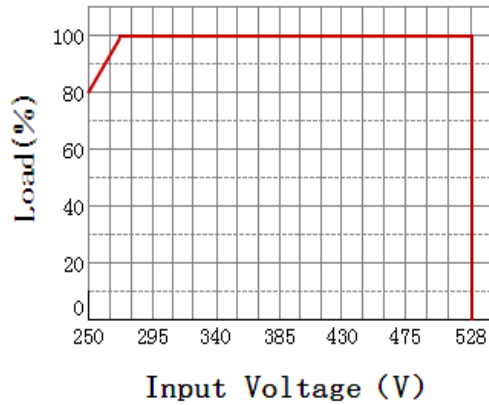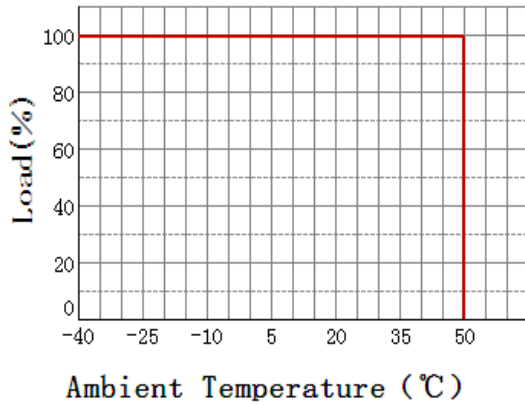


Power Factor VS. Load Curve

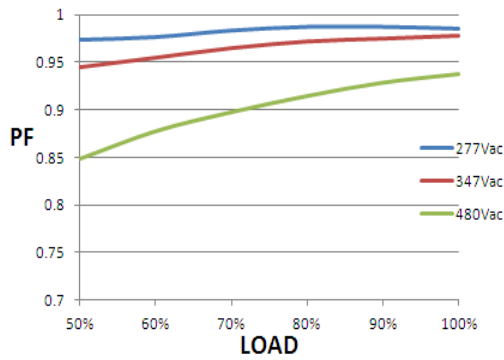


Efficiency VS. Load Curve (Model:1.05A)

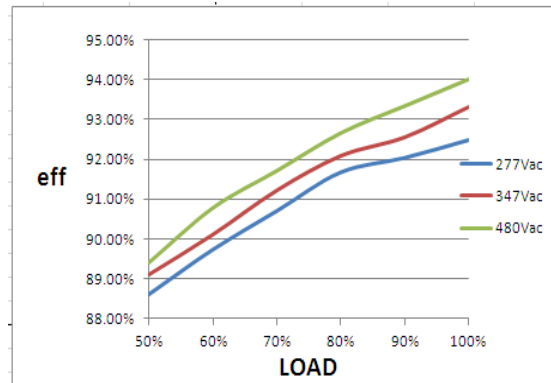

THD VS. Load Curve

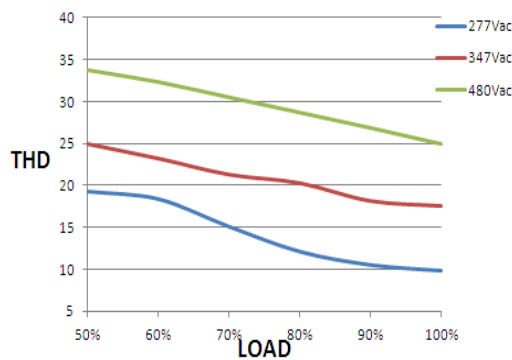


Life Time VS. Tcase (Ref.)

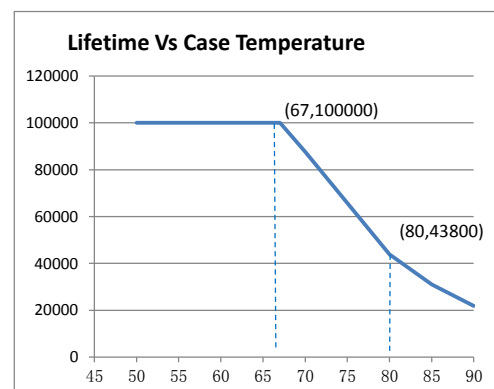


V/I Curve

For model "105" to "600":

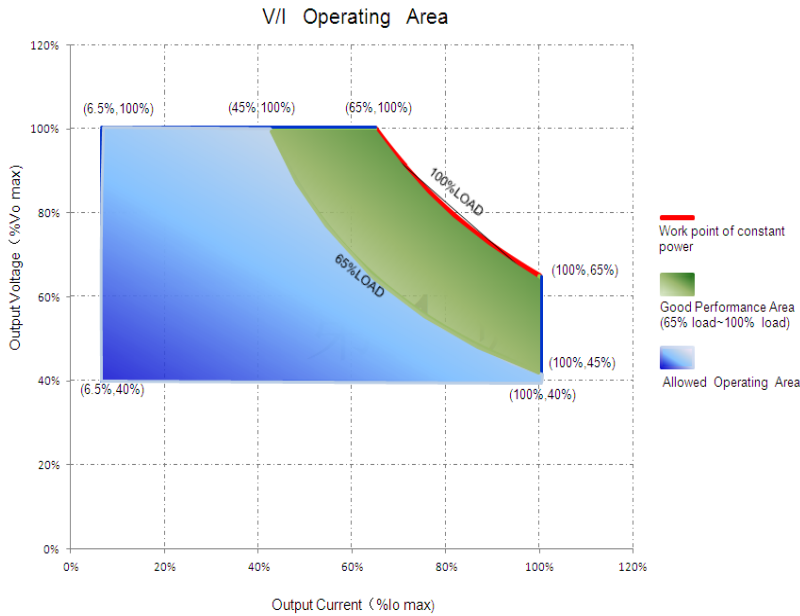


For model "800" to "1330":

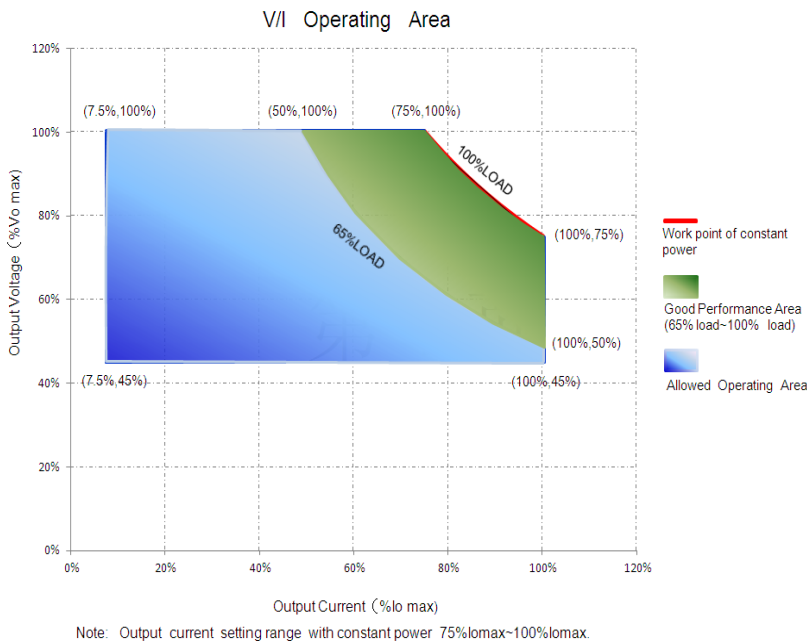

■ Instruction

1.Field Programmable Topology

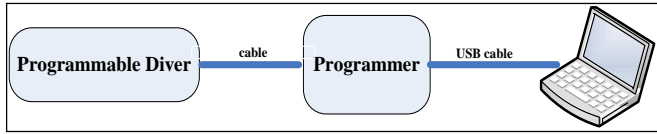


The programmable driver can be programmed by using special PC software and the programmer module.

2.Dimming Interface Description

Pin description

Pin	Destination	Value	Description
1	Vaux 12V	10.8V-13.2V	Passive dimmers power supply
2	Dim+/Program	0-10V	Dimming/Programming input
3	Dim-	0V	DC Ground



3.Dimming Software Function Instruction

■ Adjustable Output Current(AOC)

Adjustable Output Current(AOC)

Module Current mA

Max Current mA Power W

Users can set the rated current between 7%*Max Current and 100%*Max Current.

■ Adjustable Startup Time(AST)

Adjustable Startup Time(AST)

Start Fadeup Time s

Set driver's "Start Fadeup Time". It means how much time the driver costs to achieve the "Module Current" that the user set. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.

■ Fade Time(FT)


Fade Time(FT)

Fadeup Time s

Set driver's "Fadeup Time". This function is available in the Smart Midnight ClockDIM and Fixed ClockDIM mode; It means how much time the driver costs to achieve another dimming level from previous dimming level. The valid value is 0s, 1s, 2s, 5s, 10s, 20s, 40s.


■ 1-10V

Allow users to set the max and min output current and corresponding output voltage to clarify the 1-10V dimming curve. Input a 0~10V signal from 2nd pin of the dimming interface. Default: input $\leq 1V$, output current 10%; input $\geq 8.5V$, output current 100%.

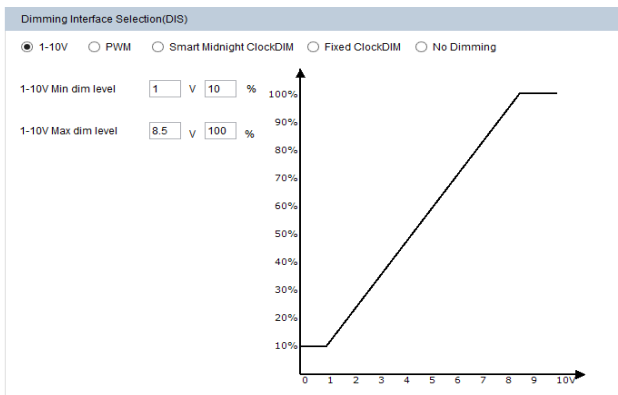


■ PWM

Input a PWM signal from the 2nd pin(Dim+/Program) of the dimming interface to change the output current. User can set "Positive Logic" or "Negative Logic" of the PWM signal. PWM duty circle: 1%~99%(it has both positive and negative logics), frequency: 500Hz~5kHz, 3V~10V is high, 0.3V~0.8V is low.

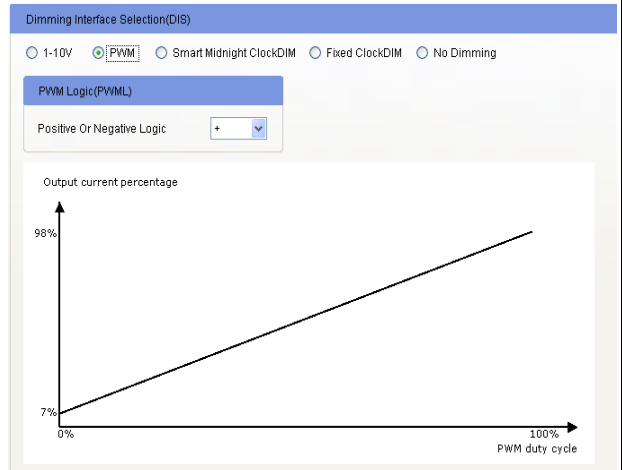


■ Instruction

■ Smart Midnight ClockDIM

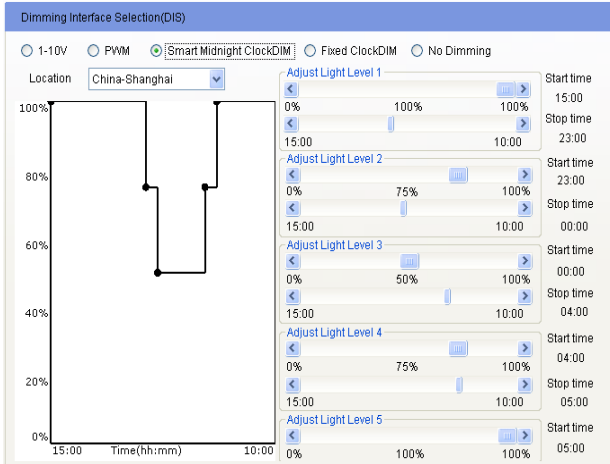


Smart Midnight ClockDIM allows dimming to predefined light levels based on the nightly operating time. With flexibility in setting time and light levels, the user can configure the driver for specific locations and application needs. Using Integrated Dynadimmer, it is possible to set up to 5 dim levels and time intervals. The driver does not have a real time clock. Instead it runs a virtual clock, determined by the length of nightly operating hours. After 3 ON-OFF cycles, the driver will calculate the virtual clock time. A valid ON-time is defined as a period during which the driver operates continuously for ≥ 4 hours to ≤ 24 hours. For example, if the requirement in summer is: 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75% (other time 100% or Off). The driver should be powered on for 7h, so it can calculate the virtual clock time as 22:00. Then we can set the dimming plan: 22:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%. From summer to winter, the valid ON-time changes day by day. The driver should be powered on for 17h in winter, and it also can calculate the virtual clock time as 17:00. Then the dimming plan is 17:00-23:00: 100%, 23:00-00:00: 75%, 00:00-04:00: 50%, 04:00-05:00: 75%, 05:00-10:00: 100%. From the above, if we set the dimming plan as shown in the picture, after repeating the driver ON-time for 3 consecutive days, the dimming plan takes effect from the 4th day onwards. Each day the driver powered on, it has a different start time according to the virtual clock time. So the driver can satisfy different requirements for different seasons.

■ Constant Light Output(CLO)

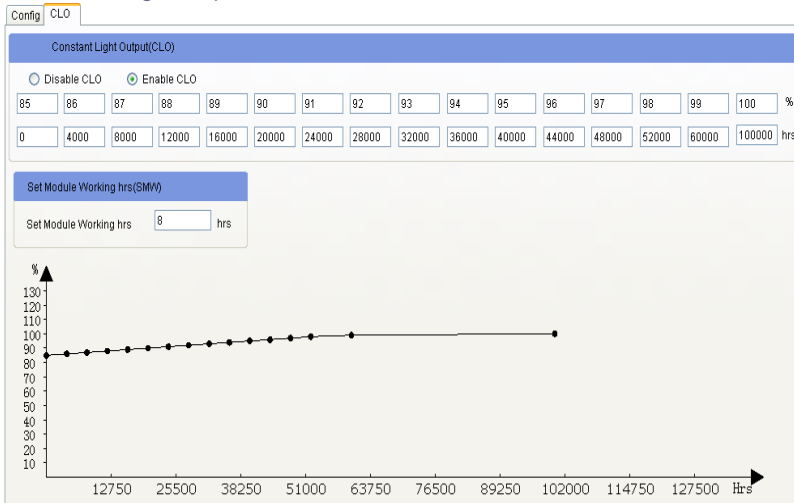

■ Fixed ClockDIM

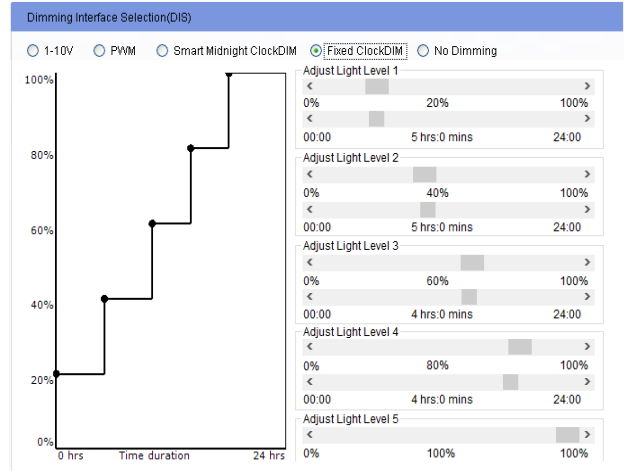


Allow users to separate 24hrs into 5 sections and corresponding output current.

■ No Dimming



The driver will be in constant output mode.

■ Set Module Working hrs(SMW)



User can check how much time the driver works through this function.


Traditional light sources suffer from depreciation in light output over time. This applies to LED light sources as well. The CLO feature enables LED solutions to deliver constant lumen output through the life of the light engine. Based on the type of LEDs used, heat sinking and driver current, it is possible to estimate the depreciation of light output for specific LEDs and this information can be entered into the driver. The driver counts the number of light source working hours and will increase output current based on this input to enable CLO.

When the CLO feature is enabled, the driver nominal output current will be defined by the CLO percentage as shown by the equation below: Driver target nominal output current = CLO percentage * AOC. For example, in the CLO profile shown in Figure, between 52,000-60,000 working hours, the CLO percentage is set at 98%. Assuming the nominal AOC is set to 500mA, the driver output current with CLO enabled will be $0.98 \times 500 = 600$ mA.

The CLO percentage can be set to a value between 85%-100%, in increments of 1%. The LED module working hours can be set to any value between (0-100,000 hours).

■ Mechanical Specification

Dimensions (Unit: mm)

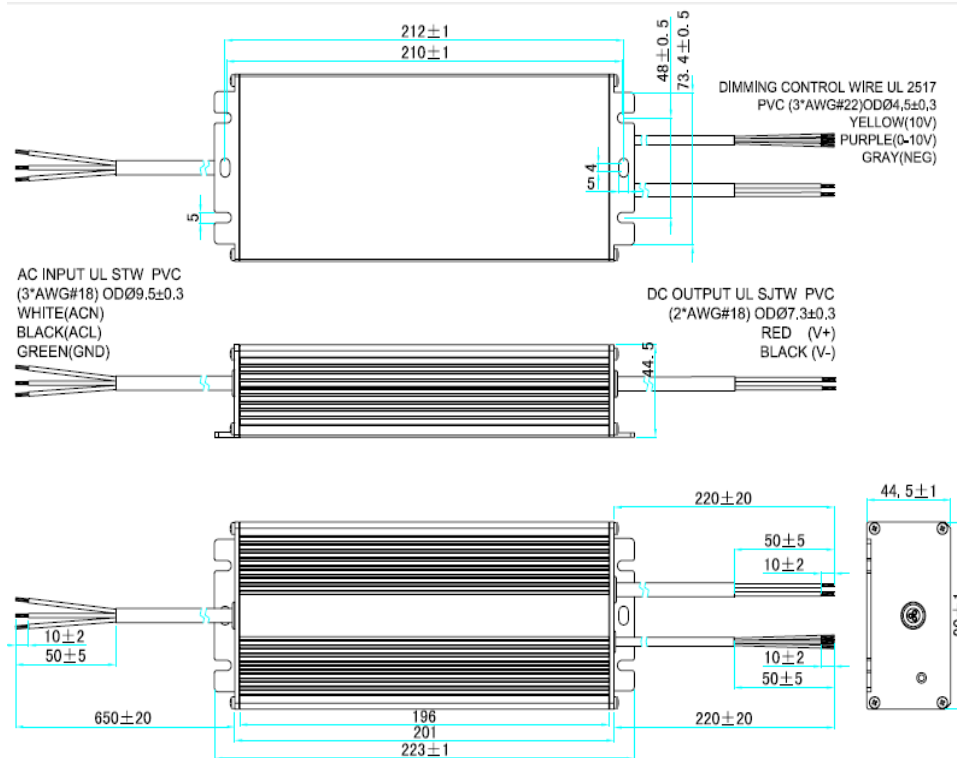

■ Label

TBD

RoHS Compliance:

Our products comply with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products.