4611130001036

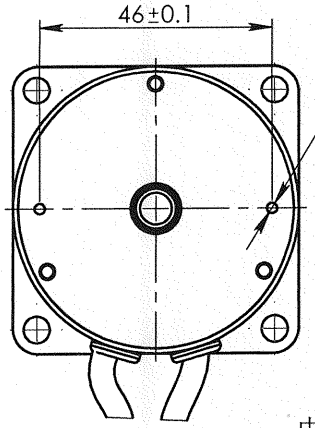

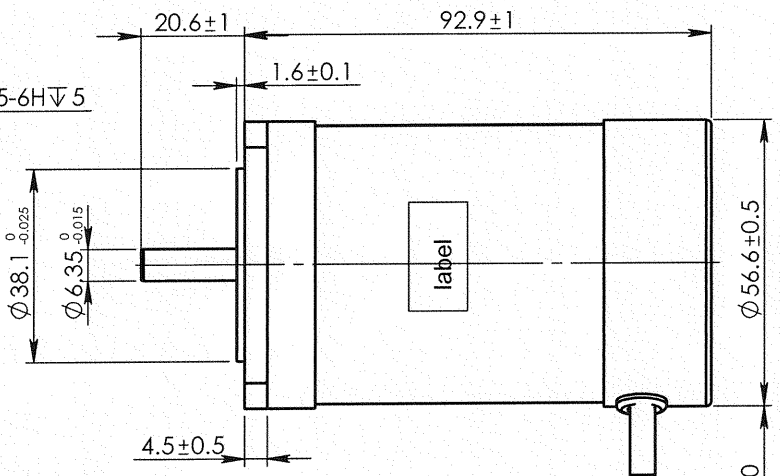

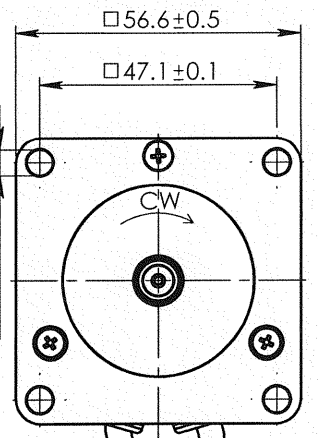

P向

MOLEX
39-01-4031



1 2 3
BLU ORN YEL

编号 NO.	线色 COLOR	定义 FUNCTION
1	蓝/blue	W
2	橙/orange	U
3	黄/yellow	V

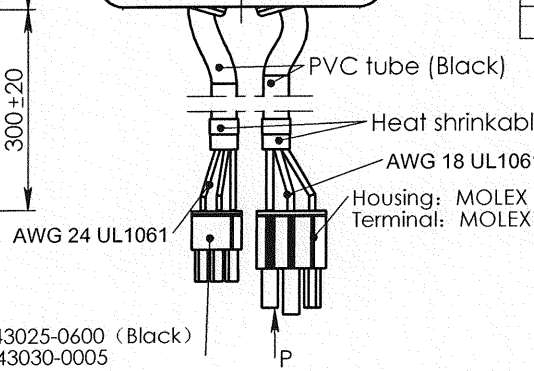

电机铭牌 Label Detail



规格
Specifications

1	额定电压/Rated power supply	36	VDC
2	额定输出功率/Rated output power	135	W
3	极数/poles	4	
4	相数/Phase	3	
5	额定转速/Rated rotational speed	4000	RPM
6	最大转速/Maximum speed	5000	RPM
7	额定转矩/Rated torque	0.33	Nm
8	额定电流/Rated winding current	5.4	A
9	线反电势系数/Voltage constant±10%	7.3	Vrms/krpm
10	惯量/Moment of inertia	1.72x10^-5	kgm^2
11	线电阻Ph/ph resistance±0.1Ω at 20℃	0.53	Ω
12	线电感Ph/ph inductance±30% at 1KHz 20℃	1.29	mH
13	电机质量/Motor mass	1.0	kg
14	绝缘等级/Insulation class	B	130℃
15	防护等级/Protective enclosure rating	IP40	

转矩-转速特性
Torque-speed specifications

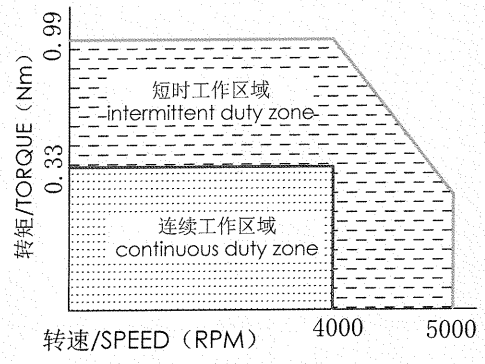

线反电势与霍尔相位关系图（顺时针）
Relation between phase EMF's and hall sensor outputs at CW

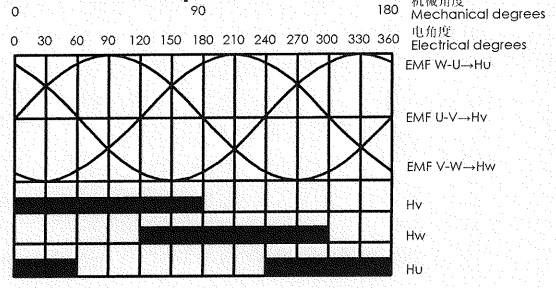

P向

MOLEX
43025-0600

BLU BLK ORN
4 5 6



1 3
RED YEL

编号 NO.	线色 COLOR	定义 FUNCTION
1	红/red	VCC(+5V)
3	黄/yellow	Hv
4	蓝/blue	Hw
5	黑/black	GND
6	橙/orange	Hu

REV.	版本记录 REVISION RECORD	DATE
A	原始版本 Original revision	2018-05-25

Unit：mm
第一角画法 FIRST ANGLE METHOD

未注线性与角度尺寸公差 Tolerances for linear and angular dimensions without individual tolerance indications GB/T 1804-m eqv ISO 2768-1：m

未注形状与位置尺寸公差 Geometrical tolerance for features without individual tolerance indications GB/T 1184-K eqv ISO 2768-2：K

UNLESS OTHERWISE SPECIFIED	NAMES	SIGNATURE	DATE
批准 Approve			
标准化 Standard			
工艺 Technology			
审核 Check			
设计 Design			

MOONS' BRUSHLESS DC MOTOR

Shanghai Moons' Electric Co., Ltd.

This document is released for information only. Its reproduction in whole or in part or its dissemination to third parties is prohibited. All trademarks and registered trademarks appearing on this document are the property of their respective owners.

Type: R57BLB130L3 | Rev.A | SCALE 1:1.5 | Sheet 1 of 1